


Energy Distribution

1U Power Distribution Units (PDU)



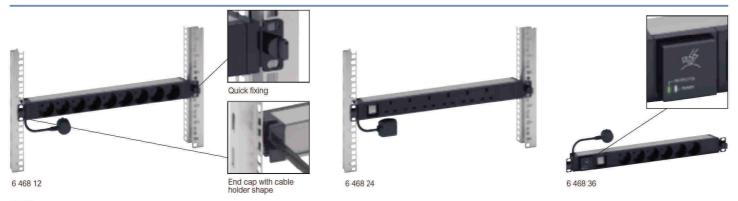

Technical characteristics p. 17

To provide ∼ electric power for IT equipments in enclosures. 230 V - 50/60 Hz power supply. 1U aluminium profile. End cap with metallic brackets and cable holder shape. Quick fixing (no screws) on 19" fixing centres. Can also be installed vertically by reverting the brackets (no screws). 2P+E outlets:

2P+E outlets.
- C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19).
- French, German and British standard outlets are equipped with shutters
- French and German standard outlets are inclined at 55°

Black modules (outlets and functions)

DIAGN IIIO	adios (out	iets and functions)
Pack	Cat.Nos	19" - PDU standard
1 1	6 468 06 6 468 12	German standard 3 m power supply cord with 16 A 2P+E French/ German plug 6 outlets 9 outlets British standard
1	6 468 13	3 m power supply cord with 13 A 2P+E British plug
1 1 1	6 468 10 6 468 11	
1 1	CORD LOCKING SYSTEM 6 468 14 6 468 15 6 468 09	10 C13 outlets with cord locking system 12 C13 outlets with cord locking system 3 m power supply cord with 16 A IEC 60309 2P+E
1.	6 468 07	6 C19 outlets with cord locking system
1	6 468 01 6 468 00	10" - PDU standard 1 m power supply cord 2P+E French/German plug 4 x 2P+E outlets German standard French standard
		19" - PDU with power indicator or luminous switch
		LED indicator gives information whether the PDU is supplied with power or not LED indicator switch powers on/off the total PDU
1 1	6 468 21 6 468 23	
1	6 468 24	British standard 3 m power supply cord with 13 A 2P+E British plug 6 outlets and 1 luminous switch
1 1	6 468 20 6 468 22	French standard 3 m power supply cord with 16 A 2P+E French/ German plug 9 outlets and 1 power indicator 8 outlets and 1 luminous switch

	Pack	Cat.Nos	19" - PDU with protection devices
			MCB and RCBO support with projecting edges to avoid accidental breakdown 3 m power supply cord with 16 A 2P+E French/German plug
	1	6 468 31	German standard 6 outlets and a 16 A single pole Micro Circuit Breaker
	1		French standard 6 outlets and a 16 A single pole Micro Circuit Breaker 6 outlets and a 16 A 30 mA Residual-current Circuit Breaker with Overcurrent protection
			19" - PDU with surge protection
	1 1		Protect against mains overvoltages while keeping outlets energised With light indicators: - one LED (white) gives information whether the PDU is supplied with power or not - one LED (green) indicates when surge protection module is efficient or must be replaced Hotswappable surge protection module Cat.No 6 468 97 (replacement keeping the PDU and its outlets powered on) With switch 3 m power supply cord with 16 A 2P+E French/ German plug 6 outlets - German standard 6 outlets - French standard
			19" - PDU with ammeter
			Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures Measure total PDU current Rotating display to ensure a perfect reading whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input)
	1	6 468 41	German standard 3 m power supply cord with 16 A 2P+E French/ German plug 6 outlets
	1	6 468 40	French standard 3 m power supply cord with 2P+E French/German plug 6 outlets
			IEC 60320 standard With integrated universal plug locking system Connection on terminal block
	1	6 468 45	6 C13 outlets with cord locking system 6 C13 outlets + 1 C19 outlet with cord locking system
	1	6 468 44	6 C19 outlets with cord locking system



